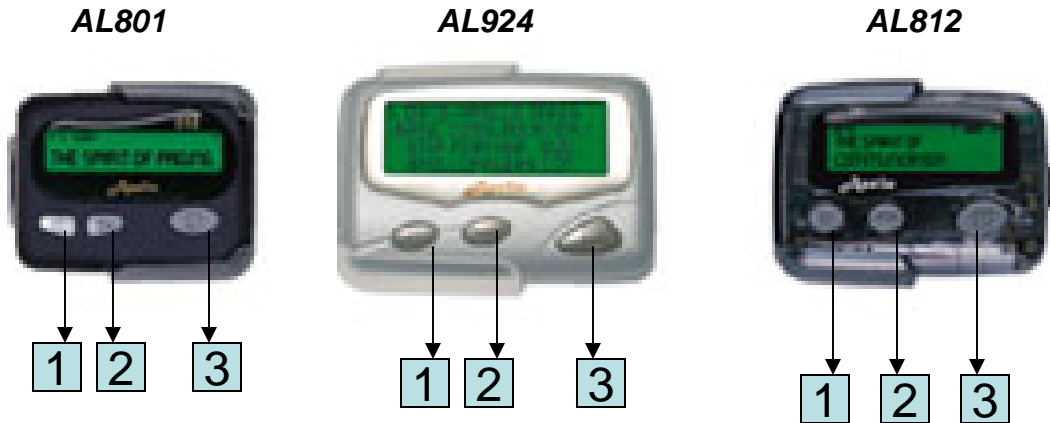# Apollo Pagers Programming Instructions

AL801   AL924   AL812

*TO PROGRAM PAGERS, REMOVE BATTERY AND HOLD DOWN BUTTON 1. INSERT BATTERY AND HOLD BUTTON 1 DOWN UNTIL"PASS 0000". OR FREQUENCY SHOWS IN THE DISPLAY

* PRESS BUTTON 3 TO CHANGE TO FREQUENCY SCREEN.

* TO CHANGE FREQUENCY PRESS BUTTON 1 TO CHANGE THE NUMBER (1,2,3, ETC) AND BUTTON 2 TO MOVE TO THE NUMBER TO THE RIGHT. WHEN FREQUENCY IS COMPLETE PRESS BUTTON 3 TO MOVE TO THE NEXT SCREEN CAPCODE ; TO CHANGE CAPCODE USE BUTTON 1 & 2

* BAUD RATE – TO CHANGE THE BAUD RATE PRESS BUTTON 2 TO CHANGE BETWEEN 512 , 1200, 2400. PRESS BUTTON 3 WHEN DONE.

*Pass "0000" – THIS IS THE LAST SCREEN. A PASSWORD CAN BE ENTERED HERE TO PROTECT THE PAGER. USE
BUTTON 1 TO CHANGE THE NUMBER AND BUTTON 2 TO MOVE TO THE NUMBER TO THE RIGHT.

* PRESS BUTTON 3 UNITL "PASS" SHOWS AND THE PAGER BEEPS. THIS CONFIRMS THE PAGER HAS BEEN PROGRAMMED.

For more information please visit us @ www.apollowireless.com